

DCS 6000

User Manual



Digital Conference System



AO 6008 Audio Output Unit
with firmware 5.3.5 or later

List of Contents

List of Contents	3	General description	7
Important	4	Features	7
Compliance	4	User controls, indications & connections	8
Installation precautions	4	Setup	9
Cleaning	4	Normal operation	12
Repacking	4	System Setup	14
Warranty	4	General guidelines	14
Description of the DCS 6000 system	5	Typical schematics	15
Features	5	Using AO 6008 with DT 60xx Digital IR- Transmitter	16
System components	6	Using AO 6008 with IT 6108 IR-Transmitter	16
Central equipment etc.....	6	Appendix	17
Interpreter equipment	6	Technical appendix	17
Voting equipment.....	6	Cabling.....	17
Conference equipment and channel selectors .	6	Accessories (not supplied)	17
Operating instructions	7	Technical specifications.....	18
AO 6008 Audio Output Unit	7		

Important

Compliance

The equipment has been tested and found to comply with the limits of the following standards for digital devices:

- EN55103-1 (Emission)
- EN55103-2 (Immunity)
- FCC rules part 15, class A (Emission)

This device complies with part 15 of the FCC rules. Operation is subject to the following conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial or light industrial environment. The equipment generates, uses, and can radiate radio frequency energy and if not installed and used in accordance with the user manual it may cause harmful interference to radio communications.

You are cautioned that any changes or modifications not expressly approved in this manual could void your authority to operate this equipment.

Installation precautions

Do not install the unit in a location near heat sources such as radiators or air ducts, or in a place

exposed to direct sunlight, excessive dust or humidity, mechanical vibration or shock.

To avoid moisture condensations do not install the unit where the temperature may rise rapidly.

Cleaning

To keep the cabinet in its original condition, periodically clean it with a soft cloth. Stubborn stains may be removed with a cloth lightly dampened with a mild detergent solution. Never use organic solvents such as thinners or abrasive cleaners since these will damage the cabinet.

Repacking

Save the original shipping cardboard box and packing material; they will become handy if you ever have to ship the unit. For maximum protection, re-pack the unit as originally packed from the factory.

Warranty

The individual units in the DCS 6000 system are minimum covered by 12 months warranty against defects in materials or workmanship..

Description of the DCS 6000 system

Features

The DCS 6000 system has the following main features:

- Fully digital
- Excellent sound quality
- “State of the Art” fully digital integrated interpretation, discussion and voting system offering interpretation, language distribution, conference microphone and voting facilities with attendance check with Chip Card™.
- New, unique digital DATA and AUDIO bus.
- 39 incoming channels (8 floor channels + 31 interpreted channels) and one Line input.
- 34 distributed channels (3 x floor + 31 interpreted channels)
- The Delegate and Interpreter units are powered and controlled by the CU 6005 Central Unit, which drives up to app. 50 units on 2 chains or by the CU 60XX Central Unit, which drives up to app. 200 units on 4 chains.
- EX 6010 Extension Units or PS 6000 Power Supplies available if more units are required
- A total of 4000 units (delegate and interpreter units) can be connected to the system.
- Using screened CAT5 or CAT5e cabling (FTP or STP) ensuring a very cost effective installation and easy set-up of portable systems
- Firmware in Delegate units, Interpreter Units, Central Units etc. upgradeable through serial PC-connection (RS232 or RS422)
- Can be operated with or without a PC.
- Added functionality and comprehensive features provided by SW 6000 software package running on PC

RS232/RS422 connection on CU 6005/6010 for external operation of the system of a PC or control system such as AMX or Crestron

The SW 6000 is an optional software package, which expands the functionality of the DCS 6000 system. The software runs on standard computer technology (Standard PC with Windows 2000 or XP).

Main features of the SW 6000 are:

- Microphone management
- Mimic panel operation
- Interpretation management
- Voting management
- Message handling
- Agenda handling
- Data stored on SQL data base for easy export/import of data
- Web interface available for easy links to external databases
- Multi language user interfaces
- Supports different User types with different priorities, user interfaces and control possibilities
- Variety of printing facilities such as speaker’s log, voting results, delegates list etc.

System components

The CU 6005/6010 Central Unit supports all available units in the DCS 6000 series:

Central equipment etc.

EX 6010	Extension Unit
PS 6000	Power Supply
AO 6004	Audio Output box
AO 6008	Audio Output box
RP 6004	Repeater for four chains
JB 6002	Junction Box with 2 outputs
JB 6004	Junction Box with 4 outputs

Interpreter equipment

IS 6132P	Interpreter Set
LS 6132P	Interpreter Loudspeaker

Voting equipment

DV 6501F	Voting Unit
----------	-------------

Conference equipment and channel selectors

CS 6032FV/H	Channel Selector (flush mounted)
CM/DM 6010P	Conference Unit (portable)
DM 6060P	Conference Unit (portable) with one built-in channel selector
CM/DM 6070P	Conference Unit (portable) with two built-in channel selectors
CM/DM 6090P	Conference Unit (portable) with two built-in channel selectors and XLR microphone connector
CM/DM 6060F	Conference Unit (flush mounted) with one built-in channel selectors
CM/DM 6510F	Conference Unit (flush mounted) with Chip-card and 3 voting buttons
CM/DM 6560F	Conference Unit (flush mounted) with one built-in channel selector, Chip-card and 3 voting buttons
MU 6040C/D	Microphone Unit for use with customised front plate with Loudspeaker, Microphone and Buttons. Available in Delegate (D) and Chairman (C) version
MU 6042D	Dual Microphone Unit for use with FD/FC front plate with Loudspeaker, Microphone and two delegate Buttons
AM 6040	Ambient Noise Microphone

Operating instructions

AO 6008 Audio Output Unit

General description

The AO 6008 Audio Output Unit for the DCS 6000 system enables the user to record the sound from a number of interpreted language channels or floor channel on external devices such as tape- or hard disk recorders by analogue interface.

It can also be used to distribute sound channels to for example infrared distribution or loudspeaker system.


Features

- Decoding of 8 language channels into analogue audio chosen out of the possible 31 digital channels as well as the Floor channel in 3 qualities.
- The 8 decoded channels are available on 8 analogue outputs (XLR connectors).
- A number of AO 6008 can be combined to decode more channels. Up to 20 pieces AO 6008 can be connected and configured in one system to decode more channels.
- User control of the AO 6008 by using the buttons and display on the front or by sending commands and reading status from a PC via CU 60XX.
- The unit is connected to the bus as any other unit and by controlling it from the CU 60XX it can be placed anywhere in the system.
- The user can set up the desired languages and volume settings, read error status, load/save settings and view information about the unit.
- A headphone connector on the front of the unit enables the user to check the sound from the analogue outputs. The sound is routed from the XLR connectors through an analogue switch to the headphones.

User controls, indications & connections

Front plate layout

The front plate layout of the AO 6008 Audio Output Unit consists of a large illuminated LCD display and 8 buttons for setting up/controlling the unit:

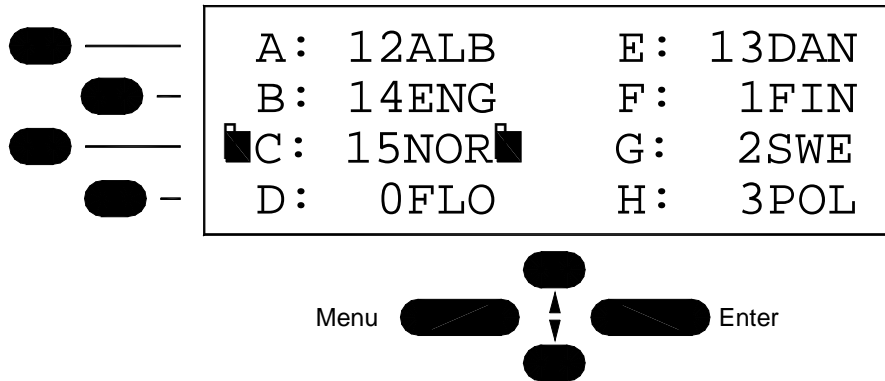

Front plate controls

The AO 6008 Audio Output Unit features the following controls and displays.

□ **LCD Display**

The display is a multi line, dot matrix, back lit, LCD display. It is possible to view the language settings for all 8 channels simultaneously. By navigating a menu structure the user can access the settings for a particular channel.

□ **Buttons**

Eight push buttons are placed on the front of the AO 6008 for changing the languages and volume settings for the output channels as well as for navigating the menu structure. The buttons have the following general functionality:

• **Four select buttons**

Four buttons placed on the left-hand side of the display. Each button is associated with a line pointing towards a text line in the display. This indicates, that pushing the button ‘selects’ the functionality.

• **Enter button**

The Enter button is used, when a selection is made in the Menu. Pressing the Enter button concludes the selection made, and at the same time it indicates a confirmation of the possible changes made within the selection. The Menu system returns to the previous menu. Notice, that some changes are applied immediately, and confirmation is thus not required.

• **Menu button**

The Menu button is also used, when a selection is made in the Main Menu. The Menu button concludes the selection, but in contrast to the Enter button, the Menu button does not confirm a possible change made within the selection. Instead, the Menu system returns to the previous menu without confirming changes, if confirmation is required.

• **Up (▲) and Down (▼) buttons**

In the normal operation display these buttons are used to select the headphone monitoring channel. In the set-up menu the Up and Down buttons are used to leaf through menu items, or to increase/decrease values within a selection

Symbols

The following symbols are used on the LCD display:

□ ‘-‘

The dash symbol (‘-‘) preceding a line of text identifies a submenu or a changeable parameter. The submenu or parameter can be selected by pressing the corresponding select button.

□ ‘>’

The ‘>’ symbol preceding a line of text identifies a selected parameter. The parameter can be changed by pressing the up and down buttons. The ‘>’ symbol is shown as long as the value of the parameter currently used is the same as the value shown in the display.

□ ‘▲▼’

The up and down symbols shown in the right side of the display (up is shown in the first line and down is shown in the last line) indicates that the current menu consists of more than 4 menu items. It is therefore necessary to use the up and down buttons to leaf through menu items.

Connectors

□ **Headphone Connectors**

A mini jack and a standard jack are located on the front plate for connecting a headphone for listening to the Floor language or one of the interpreted languages.

□ **Audio Output A to H**

On the back are located 8 XLR 3P connectors, each supplying transformer balanced audio signal from each of the 8 channels.

The outputs can be used for tape recording purpose i.e. or for connecting a digital infrared transmitter like DT6008, DT 6032 or analogue infrared transmitter IT 6108 for wireless transmission of the interpreted languages.

□ **DCS-LAN connector**

Two RJ45 sockets are located at the back of the unit for connecting to the previous unit like the CU 6005/6010 Central Unit or any other unit with a DCS LAN connector and to the next unit like an IS 6132 Interpreter set, CS 6032 Channel Selector, DM/CM 6xxx Conference Unit.

Setup

Set-up menu

The user can change the settings for the output channels by entering the **Set-up menu**. This is done by pressing the MENU button:

```
-Channel setup          ▲
-Volume setup          ▲
-Headphone setup       ▲
-Communication status  ▼
```

The menu is scrolled one line up or down by pressing the up/down arrow keys. If for example ▼ is pressed the display will reveal the next menu item at the last line.

```
-Volume setup          ▲
-Headphone setup       ▲
-Communication status  ▼
-Ver. and serial no.   ▼
```

The menu “wraps around” when the last menu item is reached at the bottom making “Language” the last entry in the display.

The whole list contains the following entries:

- Channel setup
- Volume setup
- Headphone setup
- Communication status
- Ver. and serial no
- Clipboard
- Original Attenuation

Channel setup menu

If the “Channel setup” entry is chosen the **Channel menu** is shown:

```

-Out A: 12Polish      ▲
-Out B: 13Albanian
-Out C:  2English
-Out D:  5Danish      ▼
```

An entry can be changed by selecting it with the select keys. This is marked by an ”>” to the left of the entry:

```

-Out A: 12Polish      ▲
-Out B: 13Albanian
-Out C:  2English
>Out D:  5Danish      ▼
```

Now the language can be toggled up or down with the arrow keys. The change is accepted with the ENTER key or discarded with the MENU key. The channel can be adjusted between “Floor 2, Floor 1, Floor” as the lowest channel up to the number of open interpreter channels.

The Channel menu is left with the MENU key.

❑ Floor output

There are 3 floor outputs available at the Channel menu:

Floor	Automatic gain controlled output
Floor 1	Loudspeaker audio, unregulated
Floor 2	Loudspeaker audio, regulated

An ambience microphone will only be active on the Floor channel, not on Floor 1 or Floor 2

Volume setup menu

By pressing the Volume button from the Set-up menu the user gains access to the **Volume menu**:

```

-Out A (12POL): -12 dB ▲
-Out B (13ALB): +15 dB
-Out C ( 2ENG):  0 dB
-Out D ( 5DAN): +7 dB ▼
```

From this menu it is possible to change the volume setting for each channel individually from -40 dB to +15 dB in steps of 1 dB. When selecting Off the output is muted.

The volume level for a specific output is changed in the same way as the language setting by pressing one of the four SELECT buttons. The changes are applied instantly to the audio when the up/down keys are pressed so the user can check the volume level while adjusting it.

The last item on the volume menu list is “All” by selecting this item the user can change the volume setting for all the outputs simultaneously. The outputs are all set to the value selected in this menu item.

Pressing the MENU button leaves the volume menu. This brings back the Set-up menu.

Headphone setup menu

The **Headphone setup menu** gives access to the headphone settings.

```

-Headphone monitoring: A
-Headphone volume: -20dB
```

The “Headphone monitoring” entry indicates the analogue output from which the audio for the headphones are taken. It is altered by selecting it and using the up/down keys. Range is A..H.

Headphone volume adjusts the level of the headphone monitoring output (this attenuation is applied to the channel output which is already under volume control). Range is 0dB .. -62dB (Off is mute) in steps of 1 dB. It is selected and altered in the same way as the “Headphone monitoring” entry.

Communication status menu

By pressing the key next to the Communication Status item the user is taken to the **Communication status menu**:

```

Rx Errors:           0
Tx Retries:          0
Tx Dropped:          0
-Reset counters
```

From this menu the user can view the error status of the unit and reset the error counters. The error status shows the number of errors encountered on the incoming and outgoing busses since last error reset. If the number of errors on the outgoing bus exceeds a certain amount the AO 6008 can no longer decode the audio data correctly and the audio is muted. The audio is re-enabled when the communication is normalised. The error counters are reset by pressing the Reset key.

Ver. and serial no. menu

The serial number and the unit address can be checked from the display by entering the **Ver. and serial no. menu**.

```

      AO 6008 rev A
Version:      053.017
Serial #:    200.007.123
Address:      1
  
```

From this menu the software and hardware version can also be viewed.

As usual the menu is left with the MENU key.

Clipboard menu

From this menu the user can save the settings of the AO 6008 temporarily in the CU 60XX. This feature is to be used when settings must be copied from one AO 6008 to another.

The menu holds two entries:

```

-Copy to clipboard
-Paste from clipboard
  
```

When a user wants to copy settings to another AO 6008 he executes the “Copy to clipboard” command after he has finished setting up all the channels and volume settings. This brings out a confirmation display:

```

Settings copied
to clipboard!
  
```

The settings are then transferred to another unit by executing the “Paste from clipboard” command on that unit.

The “Paste from clipboard” command brings out a confirmation display:

```

This will replace
current settings!
Proceed?
  
```

If the user presses ENTER the settings of the unit are replaced by the settings stored in the clipboard.

The settings stored in the clipboard are:

- Channel settings for all 8 outputs
- Volume settings for all 8 outputs

□ **Storing AO 6008 settings**

Each time the user changes the language or volume for an output on an AO 6008 it is communicated to the CU 60XX. This means that the CU 60XX always has an updated copy of the AO 6008 unit’s settings and it is therefore possible to store the settings in non-volatile memory on the CU 60XX by executing the “Save Configuration” command on the CU 60XX. In this way the settings for each AO 6008 will be recalled automatically when powering up the system.

If the “Save Configuration” command is not executed the settings are only stored as long as the CU 60XX has power. If an AO 6008 Unit is removed and reinserted while there is power on the CU 60XX the AO 6008 will keep its settings but if the system is powered off and on again the AO 6008 will get the settings stored in FLASH.


Original Attenuation menu

The **Original Attenuation menu** gives access to setting the attenuation level. In systems where channel selectors are used along with delegate microphones acoustic feedback can occur. This effect can be minimized by lowering the volume on the selected channel or the *attenuation* when it is carrying floor audio (because there is no interpretation taking place on the channel). The attenuation level can be adjusted between -20 and 0 dB. The 0 dB setting is used when no attenuation is desired. When selecting Off the output is muted.

Lock feature


A feature is included to hide part of the set-up menu from the user. The lock can be enabled/disabled locally from the unit by pressing a predefined key combination.

When in locked mode the user only has access to the “Headphone”, “Ver. and serial no.” and “Communication” menus and is thereby unable to make any changes to the unit configuration. The unavailable menu entries will not have a “-“ sign to the left of the entry:

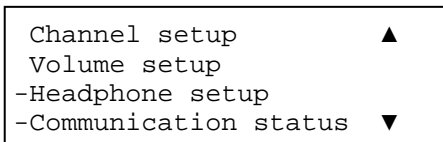


If the user presses one of the disabled menu entries the “Unit locked!” message is shown for three seconds.

The lock is activated from the unit by holding the ENTER button depressed for five seconds in the set-up menu display. This brings up a confirmation display for three seconds:

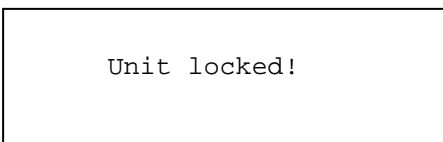

The unit is unlocked in the same way by holding the ENTER key depressed and a confirmation display is shown:

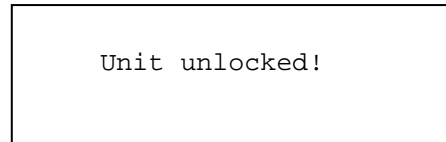


The lock status is being saved in the CU 60XX and retransmitted to the unit after power up.

Normal operation

Normal Operation Display

In normal operation the user must be able to check the language setting of all the output channels from a single display without pressing any buttons. This is the **Normal Operation Display**:

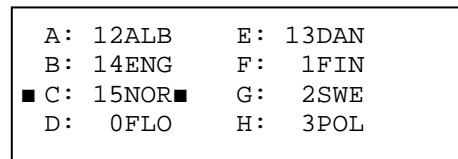

This display indicates which language-channel has been assigned for each of the 8 outputs. And the filled square indicates the channel, where the headphone is monitoring. Use the up (▲) and down (▼) buttons to select the headphone monitoring channel.

If an output is set to a language that no longer exists the language indication will be “---“. The user can then choose a new language for the channel. If no buttons have been pressed for 2 minutes the display will change to shown the Normal Operation display.

□ Menu

The user has access to the following functions, by pressing the Menu button:

- Language for each output channel.
- Volume setting for each channel.
- Monitoring output and volume for headphone.
- Communication status.

- Unit info.
- Load/save of configuration.

- Original Attenuation.

Refer to Setup section for information in how to setup the system using the above menus.

System Setup

General guidelines

Connect the AO 6008 to the various units using Cat 5 FTP or STP cables. Please observe the following guide lines:


- Maximum cable length in one chain is 200 m without repeater. This includes interconnection cables between the units. The max. usable cable length depends on the units connected and length of feeding cables etc.
- Maximum cable length in one chain when using repeaters is 650 m.

If the last unit in one chain is a CS 6032 Channel Selector, this unit has to be terminated with an external termination, as the CS 6032 does not have an internal termination.

Typical schematics

Connect the AO 6008 to the DCS 6000 network using Cat 5 cables. The Analogue Audio output connectors are connected to either Tape recorders

for recording the interpreted channels or to DT 6008/DT 6032 Infrared Transmitter for transmitting the interpreted channels wireless.

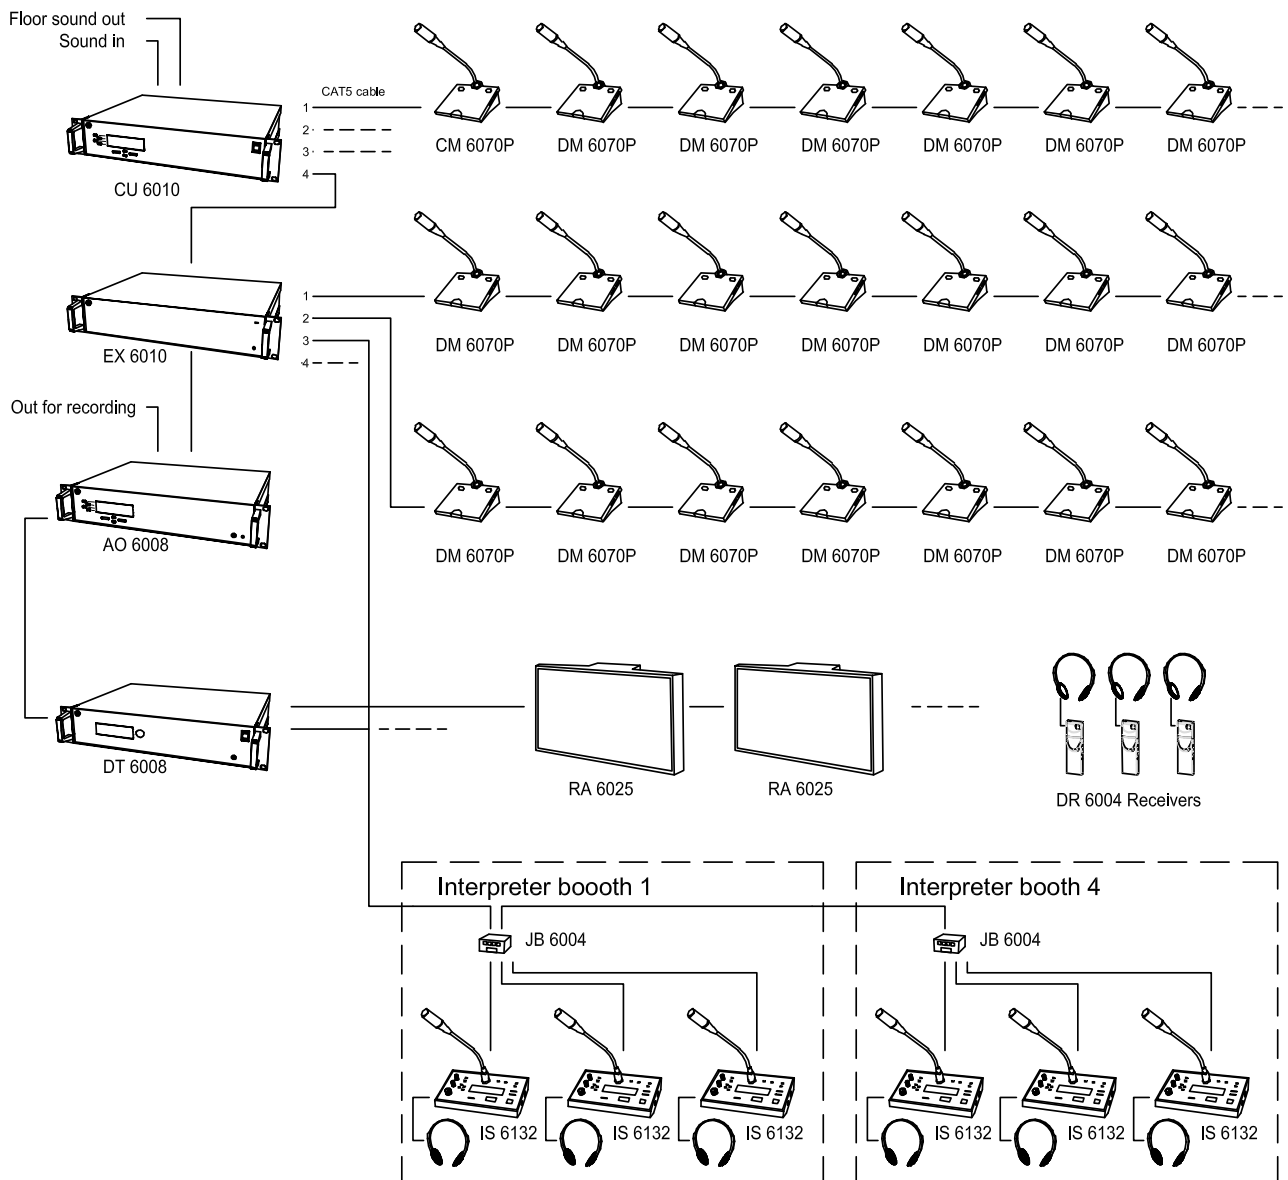

Using AO 6008 with DT 60xx Digital IR-Transmitter

When using the AO 6008 with the DT 60xx Infrared Transmitter, the audio output level on the AO 6008 has to be set to match the sensitivity on the transmitter.

The correct level to be set on each connected channel on the AO 6008 is +3dB. This level is

factory preset, but can as earlier mentioned be changed using SW 6000. The DT-60XX input level settings should be set to -6dB.

Using AO 6008 with IT 6108 IR-Transmitter

When using the AO 6008 with the IT 6108 Infrared Transmitter, the audio output level on the AO 6008 has to be set to match the sensitivity on the transmitter

The correct level to be set on each connected channel on the AO 6008 is -12db

Appendix

Technical appendix

Cabling

CAT5

The DCS 6000 system uses CAT5, CAT5e or CAT6 FTP or STP cables with screened RJ45 connectors.

EIA 568-B wiring shall be used.

It is important to use only FTP or STP (screened) cables and screened RJ45 connectors and not UTP cable, which is unshielded.

How to wire a CAT5 (EIA 568-B) Cable:

Pin	Function	Connector #1	Connector #2
1	In-going +	ORG/WHT	ORG/WHT
2	In-going -	ORG	ORG
3	+48V	GRN/WHT	GRN/WHT
4	0V	BLU	BLU
5	0V	BLU/WHT	BLU/WHT
6	+48V	GRN	GRN
7	Outgoing -	BRN/WHT	BRN/WHT
8	Outgoing +	BRN	BRN

Note. If other colour codes are used then the four pairs are connected as follows:

- Pair 1: Pin 1 & 2
- Pair 2: Pin 3 & 6
- Pair 3: Pin 4 & 5
- Pair 4: Pin 7 & 8

The phase of the pairs must be correct and the wiring spec. as stated in CAT5 (EIA 568-B) have to be followed.

Note: CAT6 cables can normally only be terminated in sockets (female) and not in cable plugs. CAT6 should thus only be used for long cable draws terminating in wall outlets or patch panels.

Analogue out (XLR3 male)

Pin	Signal	Cable type
1	Ground	DIS type #2914 or 2 x 0,25 mm ² shielded.
2	In phase signal	
3	Out phase signal	

Accessories (not supplied)

DH 9001 Headphone.....	14 11 03050
EC 6000-..5 Connection Cable 0.5 m.....	10 03 12500
EC 6000-01 Connection Cable 1 m.....	10 03 13101
EC 6000-02 Connection Cable 2 m.....	10 03 13201
EC 6000-05 Connection Cable 5 m.....	10 03 13501
EC 6000-10 Connection Cable 10 m.....	10 03 14102
EC 6000-20 Connection Cable 20 m.....	10 03 14202
EC 6000-50 Connection Cable 50 m.....	10 03 14502

Technical specifications

Digital Section

Sound quality20 bit audio @ 32 kHz sampling frequency

Analogue Section

Output signal type.....ground lifting transformer balanced

Nominal output level: 0 dBm at nominal input

Max. Output level:..... 15 dBm

Frequency response 50-15kHz

Signal to noise ratio: >85 dBA

Total harmonic distortion: < 0.1%

General

Power requirement..... 24-48 V DC

Power consumption 5W maximum

Power supplied from

.....CU 6005 / CU 60XX / EX 6010 / PS 6000

Temperature to guarantee specified performance

.....5 Deg C. to 40 Deg C. (35 to 80% humidity)

Storage temperature

..... -20 Deg C. to 60 Deg C. (10 to 80% humidity)

Weight 4,5 kg

Dimensions (W x H x D) 425 (483) x 87 x 317 (357) mm

dimensions in bracket are including 19” brackets

Accessories supplied..... User manual

Connectors

DCS-LAN network 2 pieces RJ45

Analogue outputs connectors 8 - XLR3 male connectors

Remote Control commands in/out

By using SW 6000 the user can control the AO 6008 through the CU 6005/6010. A number of control messages are used for this communication.

The CU 6005/6010 can read the following info from the AO 6008:

- * Error status
- * Channel number for each channel
- * Volume setting for each channel
- * Serial number
- * Software version
- * Hardware version

The CU 6005/6010 can control the following settings:

- * Volume steps for all channel
- * Channel number for each output channel and headphone
- * Volume setting for each channel and headphone
- * Error counter (reset)

The settings can be controlled from the SW 6000 or using the AO 6008 User Interface (with exception of setting of volume steps.

The CU 6005/6010 continuously monitors the status of the AO 6008 to ensure that updated status of the unit is always present on the CU 6005/6010.

Specifications are subject to change without notice.

